


1 2 3 4 5 6 7

A

A

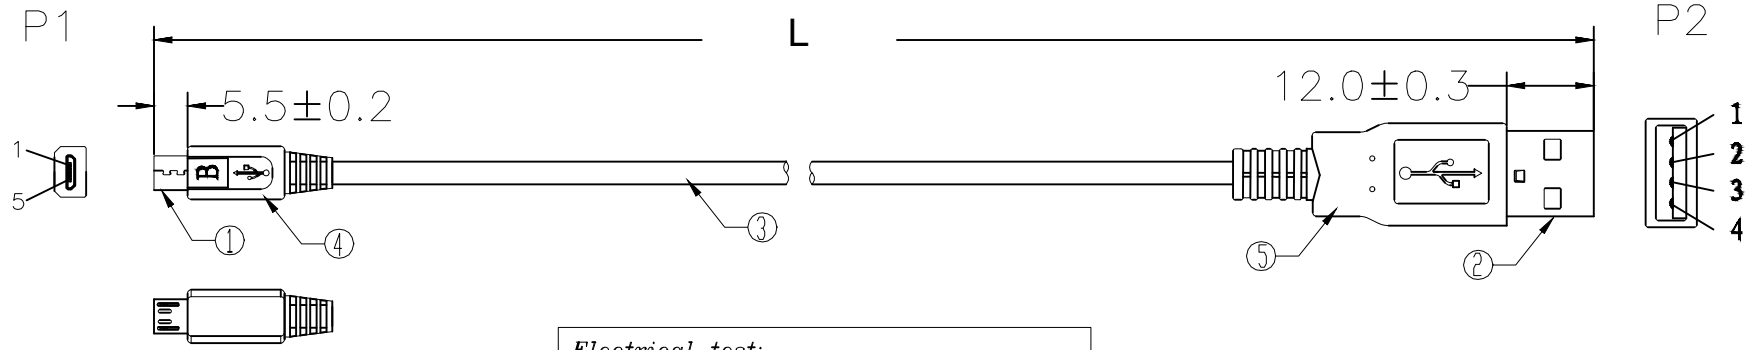

B

B

C


C

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

WSW P/N	L
AK67421-0.5-R	500±15
AK67421-1-R	1000±20
AK67421-2-R	2000±20
AK67421-3-R	3000±30
AK67421-5-R	5000±50

D

D

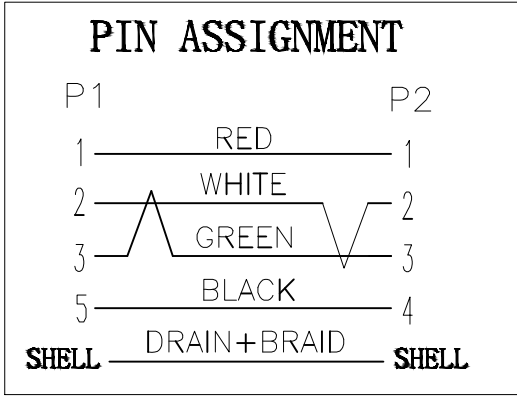

E

E

NO.	NAME	Q'TY	SPECIFICATION
⑧	TIE	1	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-40)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-116)
③	CABLE	1	USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC) JACKET:BLACK OD:3.5mm
②	CONN	1set	USB A MALE SHELL:NICKEL PIN:G/F 3PCS TYPE INSULATOR COLOR:WHITE
①	CONN	1	MICRO USB 5P B/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK

F

F

G

G

**RoHS compliant**  
Unit:mm

Scale	Free				Date	Name	Customer-No.
TOLERANCE					Drawn	10.04.2013	Joanna
					Approved	10.04.2013	Joanna
DIM	TOL						
Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet

ASSMANN WSW-No.  
**AK67421-X-R**

Drawing-No.  
**ASS 7091 CA** rev00

H

H

1 2 3 4 5 6 7