

Connector set - HC-STA-B24PT-BWSC-LS-M32-ELCAL - 1416358

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Connector set, Number of positions: 24, Material: Die-cast aluminum, salt water resistant, Connection method: Push-in connection, Connection cross section: AWG 26-14



Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	780.0 g
Custom tariff number	85366990
Country of origin	China

Technical data

General

Number of positions	24+PE
Type	B24
Connection method	Push-in connection
Degree of protection for housing	IP66
	IP69K (ISO 20653:2013-02)
	IP67
	IP54 (with closed protective cover)
	4
	4X
	12
Connection method	Push-in connection
Rated voltage (III/3)	500 V
Rated surge voltage	6 kV

Connector set - HC-STA-B24PT-BWSC-LS-M32-ELCAL - 1416358

Technical data

General


Rated current	16 A
---------------	------

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Drawings

Schematic diagram




Schematic diagram




Pin assignment, connection side, pin

Pin assignment, connection side, socket

Diagram

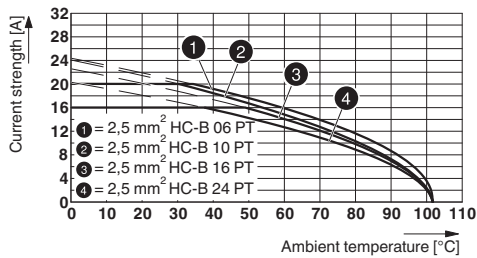

Dimensional drawing

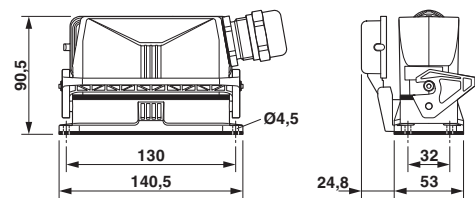


Dimensional drawing

Derating diagram

Connector set - HC-STA-B24PT-BWSC-LS-M32-ELCAL - 1416358

Dimensional drawing



Panel cutout

Articles in set

Contact insert - HC-B 24-I-PT-F - 1407735



HEAVYCON socket insert, B24 series, 24 + PE-pos., push-in connection

Contact insert - HC-B 24-I-PT-M - 1407736



HEAVYCON pin insert, B24 series, 24 + PE-pos., push-in connection

Housing - HC-STA-B24-BWSC-ELC-AL - 1411330



HEAVYCON B24 panel mounting base, with single locking latch, with plastic protective cover, with flat gasket, salt-water-resistant aluminum, conductive profile gasket.

Housing - HC-STA-B24-HLFS-1STM32-EL-AL - 1412784



Sleeve housing B24, for single locking latch, Material: Die-cast aluminum, salt water resistant, Cable outlets: 1, lateral, Height: 60 mm, Cable gland: none, Gland: no, 1x M32, Standard

Connector set - HC-STA-B24PT-BWSC-LS-M32-ELCAL - 1416358

Articles in set

Cable gland - G-INS-M32-M68N-NNES-S - 1411166



Cable gland, Cable gland material: Brass, nickel-plated, External cable diameter 15 mm ... 21 mm, Shielding: No, Connecting thread: M32, Color: silver

Classifications

eCl@ss

eCl@ss 5.1	27143424
eCl@ss 8.0	27440101
eCl@ss 9.0	27440101

ETIM

ETIM 5.0	EC002636
----------	----------

Approvals

Approvals

Approvals

EAC / GL

Ex Approvals

Approvals submitted

Approval details

EAC

GL
